


C25-6-012

Tweeter

DOMEMATERIAL:	CERAMIC
APPLICATION:	TWEETER
NOMINAL DIAMETER:	25 mm
SENSITIVITY:	90 dB



MAIN FEATURES :

SPECIAL DOME CUTOUTS

OVERHUNG MOTOR DESIGN

SOFT FABRIC SURROUND

VENTED VC & POLE PIECE

2500 HZ - 32 KHZ


The **C25 - 6 - 012** is a 1 inch tweeter with ultra hard **ceramic dome** in a 82 mm frontplate.

Anti-resonant **cutout fills** in the ceramic dome provide for damping of the dome resonance.

An overhung motor design with vented aluminium voice coil former guarantees low energy storage and excellent heat transfer.

The **soft fabric surround** and ferrofluid with high viscosity center the moving parts with distinctive linearity.

We recommend an application above 2500 Hz.

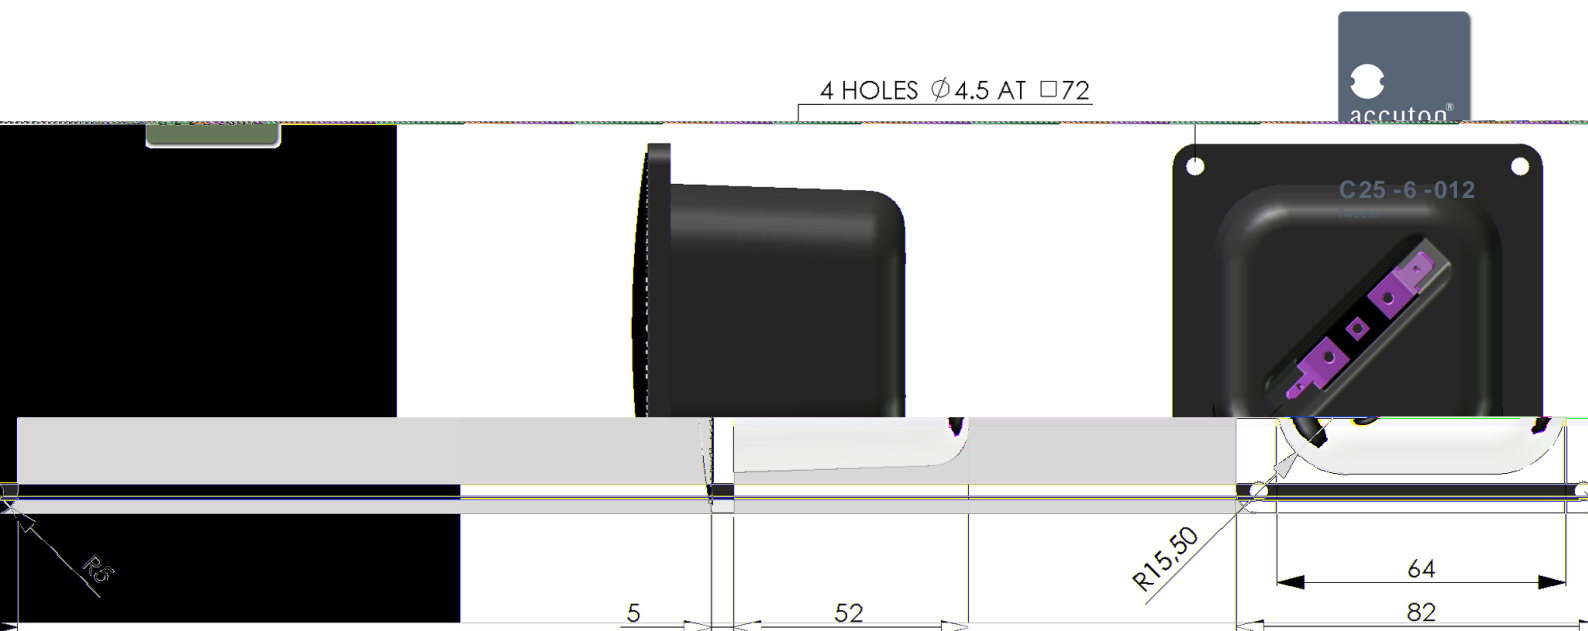

Mechanical data

Overall square	82	mm
Cutout hole square	64	mm
Front plate depth	5	mm
Overall depth	57	mm
Motor assembly diameter	-	
Motor assembly depth	-	
Screw fitting	DIN 7984, 4mm	
Terminal	+ : 4.8 x 0.8 / - : 2.8 x 0.8	mm
Shipping weight / net weight (one piece)	0.68 / 0.58	mm
Shipping box size (pair)	130 / 130 / 190	mm

Thiele/Small Parameters

Sensitivity (2.83V / 1m)	Lp	90*	dB
DC-resistance	Re	6.2	Ohm
resonance frequency	Fs	740	Hz
equivalent volume of air	Vas	-	L
mechanical Q	Qms	0.55	
electrical Q	Qes	1.19	
total Q	Qts	0.38	
effective piston area	Sd	5.94	cm ²
moving mass	Mms	0.23	g
suspension compl.	Cms	0.141	mm/N
mechanical resistance	Rms	1.91	kg x s

Voice Coil data

Power handling	P	120*	Watt
Linear excursion	Xmax	+/- 0.6	mm
Voice coil diameter		16.4	mm
Voice coil former material		Al	
Voice coil wire material		Cu	
Voice coil inductance	Le	0.02	mH
Force factor	Bl	2.35	N/A
Motor type		Overhung	
Ferrofluid filling		yes	

* Please refer to www.accuton.com for exact measurement conditions and further information.

All rights reserved - All data with reservation and subject to change.

Thiel & Partner GmbH Kantstrasse 1 50259 Puffendorf T +49 (0) 2238 / 475475 a.bankwitz@accuton.com