




### **MIDWOOFER**

## 15WU/8741T00

The Illuminator midranges and midwoofers are in every aspect unusual designs with the open construction, the extremely long linear excursion and patented under-hung SD-3 (Symmetrical Drive) neodymium motor system, which due to copper caps and its construction ensures very low distortion, adding the unique patented cones, low-loss linear suspension the result is: "The Very Best Money Can Buy"!

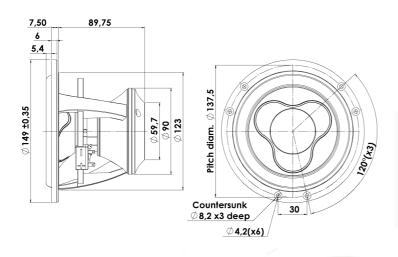



### **KEY FEATURES:**

- Under-Hung Neodymium Motor Design
- · Patented Sandwich Paper Cone
- · Low-loss linear suspension

#### **T-S Parameters**

Resonance frequency [fs]	35 Hz
Mechanical Q factor [Qms]	3.37
Electrical Q factor [Qes]	0.28
Total Q factor [Qts]	0.26
Force factor [BI]	7.5 Tm
Mechanical resistance [Rms]	0.80 kg/s
Moving mass [Mms]	12.3 g
Suspension compliance [Cms]	1.68 mm/N
Effective diaph. diameter [D]	108 mm
Effective piston area [Sd]	92 cm <sup>2</sup>
Equivalent volume [Vas]	19.9 l
Sensitivity (2.83V/1m)	83.4 dB
Ratio BI/√Re	3.09 N/√W
Ratio fs/Qts	135 Hz

#### Notes:

IEC specs. refer to IEC 60268-5 third edition. All Scan-Speak products are RoHS compliant. Data are subject to change without notice. Datasheet updated: February 22, 2011.

- Patented Symmetrical Drive (SD-3)
- Exceptionally Long Linear Excursion
- Patented Design

#### **Electrical Data**

Unit weight

8 Ω
7.9 Ω
76.9 Ω
5.9 Ω
0.41 mH
80 W
. = 0
150 W
150 W
150 W
150 W 42 mm
42 mm
42 mm 8 mm
42 mm 8 mm 4

1.7 kg








## **MIDWOOFER**

## 15WU/8741T00

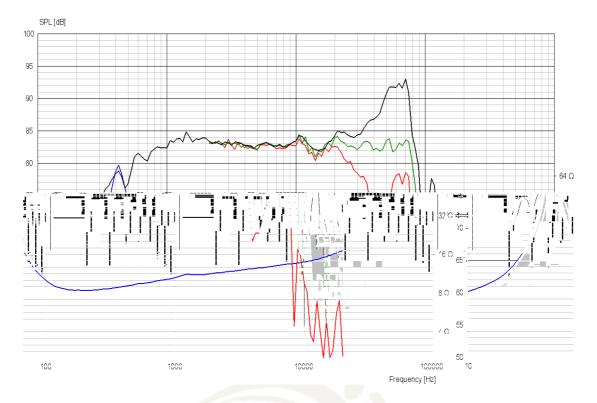

# Advanced Parameters (Preliminary)

