



ET 338-104

Elite Tweeter,

Ø 104mm, 8Ω

SPECIFICATIONS

General Data		
Overall Dimensions	DxH	104mm(4.09")x66mm(2.59")
Nominal Power Handling (DIN)	P	200W
Transient Power 10ms		1000W
Sensitivity 1W/1M		92.5dB SPL
Frequency Response		1,800-20,000 Hz
Cone/Dome Material		Acuflex™ hand coated soft dome
Net Weight	Kg	1.08

Electrical Data		
Nominal Impedance	Z	8Ω
DC Resistance	Re	5.2Ω
Voice Coil Inductance @ 1KHz	LBM	0.09mH



Voice Coil and Magnet Parameters		
Voice Coil Diameter	DIA	28mm
Voice Coil Height		2.7mm
HE Magnetic Gap Height	HE	2.5mm
Max. Linear Excursion	X	
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		Triple Ferrite
B Flux Density	B	1.95 T
BL Product	BXL	6.3 N.A

T-S Parameters		
Suspension Compliance	Cms	
Mechanical Q Factor	Qms	
Electrical Q Factor	Qes	
Total Q Factor	Qts	
Mechanical Resistance	Rms	
Moving Mass	Mms	0.44 g
Eq. Cas Air Load (liters)	VAS	
Resonant Frequency	Fs	700 Hz 10%
Effective Piston Area	SD	6.0 cm ²

- ### Features
- * 104mm IDR™ Improved Dispersion Recess
 - * Aluminum Face Plate
 - * Large Hexatech™ aluminum voice coil
 - * Replaceable Acuflex™ dome / coil assembly
 - * Triple magnet system
 - * High power handling
 - * Sturdy gold plated input tags

Unit Dimensions

A - Overall diameter	104mm
B - Magnet diameter	76mm
C - Face plate thickness	3mm
D - Overall depth	66mm
E - Magnet depth	63mm
F - Mounting holes location diameter	94mm
G - Mounting holes diameter	Ø 3.7mm
inner hole diameter	Ø 3.7mm
pocket	h 1mm, Ø 7mm

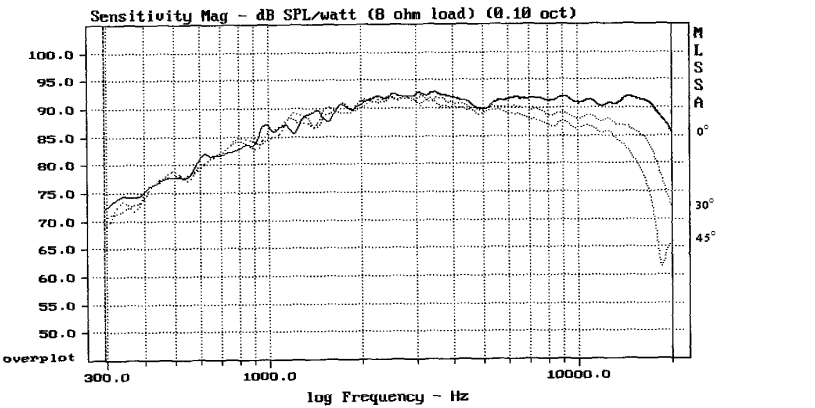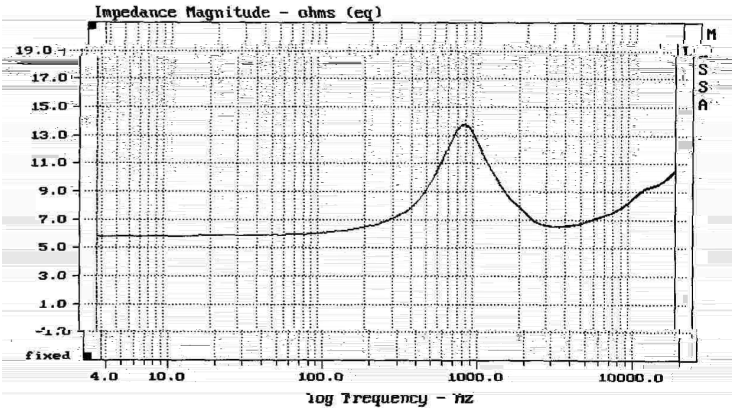

Faceplate is available in either Black or Silver
Morel operating policy on continuous product development, improvement, consequently specifications are subject to alteration without prior notice.